


# Actuator

61-0039.0

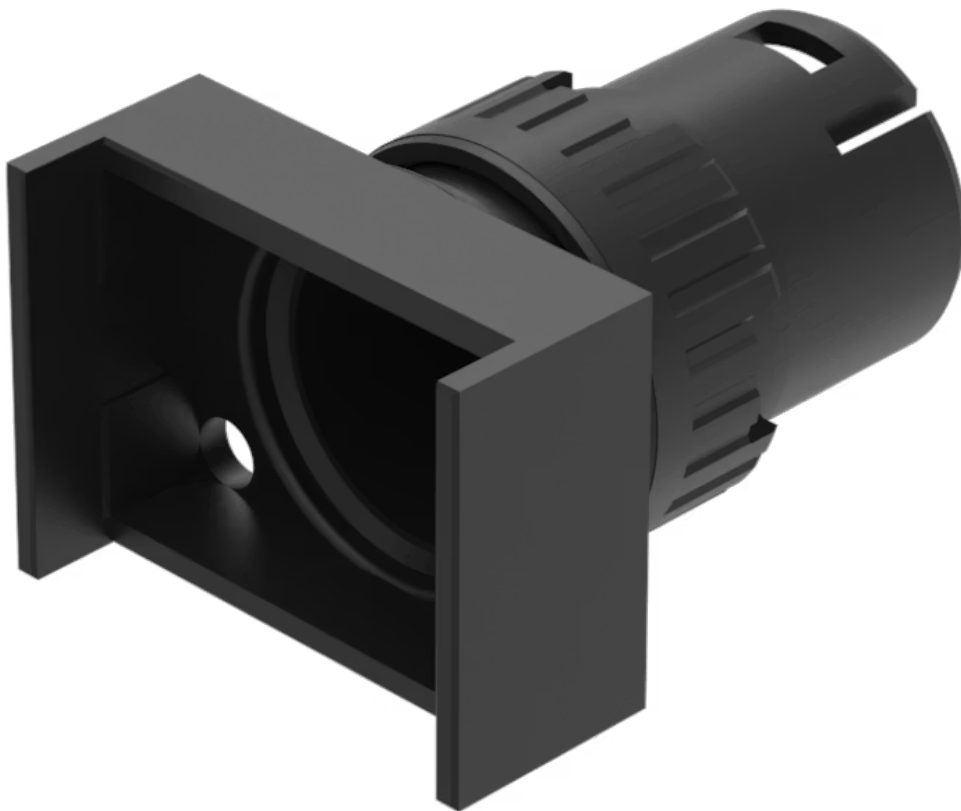

<https://www.eao.com/component/61-0039.0/en/ac...>

Your product:

---



## 61-0039.0 Actuator

### FRONT

|                       |               |
|-----------------------|---------------|
| Front dimension:      | 24 mm x 18 mm |
| Front form:           | Rectangular   |
| Front bezel colour:   | Black         |
| Front bezel material: | Plastic       |

### MOUNTING

|                   |                |
|-------------------|----------------|
| Mounting cut-out: | Ø 16 mm        |
| Mounting type:    | Panel mounting |

### MECHANICAL CHARACTERISTICS

|                    |             |
|--------------------|-------------|
| Tightening torque: | Max. 0.5 Nm |
| Weight:            | 0.004 kg    |

### AMBIENT CONDITION

|                        |                                                                                       |
|------------------------|---------------------------------------------------------------------------------------|
| IP Protection:         | IP40 rear side, according to EN IEC 60529, IP67 front side, according to EN IEC 60529 |
| Operating temperature: | – 25 °C ... + 55 °C                                                                   |
| Storage temperature:   | – 40 °C ... + 85 °C                                                                   |

### CERTIFICATE

|        |                 |
|--------|-----------------|
| REACH: | REACH compliant |
| RoHS:  | RoHS compliant  |

## OTHER


**Short Description:** Actuator, Ø 16 mm, 24 mm x 18 mm, Rectangular, Black, Plastic

**Internal size:** 21,5 mm x 15,3 mm


**Housing colour:** Black

**Housing material:** Plastic, according to UL 94 V0, self-extinguishing

**Wiring diagrams:**

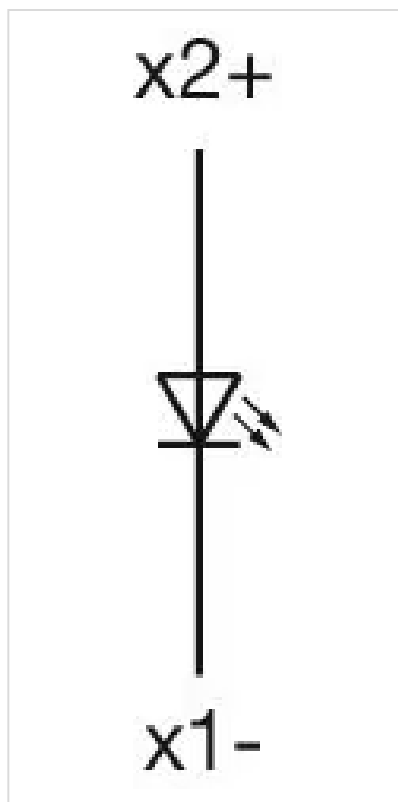

**Mounting cut-outs:**

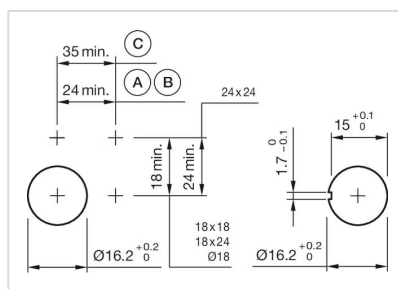


A = Solder/Plug-in terminal 2.8 mm x 0.5 mm

B = Solder terminal

C = Screw terminal

**Dimension drawings:**

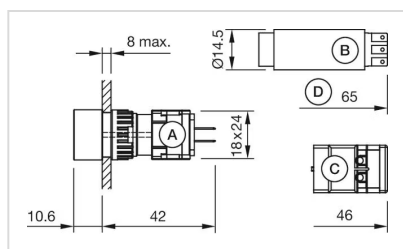

A = Plug-in terminal 2.8 mm x 0.5 mm

B = Solder terminal

C = Screw terminal

D = Flasher

E = Slow-make switching element

F = Snap-action switching element