

# Rugged Outdoor Switch

09-RS.1203.4022.M000



<https://www.eao.com/component/09-RS.1203.4022...>

Your product:

---



## 09-RS.1203.4022.M000

### Rugged Outdoor Switch

#### FRONT

|                       |         |
|-----------------------|---------|
| Front dimension:      | Ø 39 mm |
| Front form:           | Round   |
| Front bezel colour:   | Black   |
| Front bezel material: | Plastic |
| Front bezel shape:    | Raised  |

#### MOUNTING

|                   |         |
|-------------------|---------|
| Design:           | Raised  |
| Mounting cut-out: | Ø 30 mm |

#### OPERATING-/INDICATION PART

|                        |                          |
|------------------------|--------------------------|
| Lens colour:           | Zinc yellow              |
| Lens material:         | Plastic                  |
| Lens illumination:     | Illuminated              |
| Lens shape:            | Concave                  |
| Lens type:             | Raised above front bezel |
| Symbol:                | No Symbol                |
| Illumination colour:   | Red                      |
| Shape of illumination: | Dot                      |

#### ELECTRICAL CHARACTERISTICS

|           |      |
|-----------|------|
| Contacts: | 1 NO |
|-----------|------|

|                             |                            |
|-----------------------------|----------------------------|
| <b>Contact Type:</b>        | Magnetic Reed Switch       |
| <b>Operating voltage:</b>   | 24 V DC (LED) +4           |
| <b>Power (W):</b>           | 10                         |
| <b>Switching rating:</b>    | 24 V DC @ 0,2 A            |
| <b>Electrical lifetime:</b> | 1 Mil. cycles of operation |
| <b>Thermal current Ith:</b> | 0.2 A                      |

## MECHANICAL CHARACTERISTICS

|                             |                                          |
|-----------------------------|------------------------------------------|
| <b>Terminal:</b>            | 1.5 Series AMP Superseal 3 Pin Connector |
| <b>Contact material:</b>    | Rhodium/Silver                           |
| <b>Switching action:</b>    | Momentary                                |
| <b>Mechanical lifetime:</b> | 1 Mil. cycles of operation               |
| <b>Operating force:</b>     | 25 N                                     |
| <b>Operating Travel:</b>    | 5 mm ± 0.1 mm                            |
| <b>Tightening torque:</b>   | 2.5 ... 3 Nm fixing nut                  |
| <b>Weight:</b>              | 0.04 kg                                  |

## AMBIENT CONDITION

|                               |                                                                                                                                                     |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>IP front protection:</b>   | IP67 (ISO 20653)                                                                                                                                    |
| <b>IP Protection:</b>         | IP67 rear side (ISO 20653)                                                                                                                          |
| <b>Operating temperature:</b> | - 20 °C ... + 100 °C (DIN EN 60068-2-64)                                                                                                            |
| <b>Storage temperature:</b>   | - 20 ° C ... + 100 ° C (DIN EN 60068-2-64)                                                                                                          |
| <b>Vibration resistance:</b>  | Vibration TL80101 (2006-10) chapter 4.1.4 test severity level 3, Test Conditions according DIN EN 60068-2-64 test duration 2 hours per spatial axis |
| <b>Climate resistance:</b>    | 100 cycles (- 20 °C ... + 100 °C), with 25min at high temperature, 20 min at low temperature level per cycle                                        |

## CERTIFICATE

|                      |                                                    |
|----------------------|----------------------------------------------------|
| <b>Approbations:</b> | EMC (EN ISO 13766-1:2018), EMC (EN ISO 14982:2009) |
| <b>Conformities:</b> | CE                                                 |
| <b>REACH:</b>        | REACH compliant                                    |
| <b>RoHS:</b>         | RoHS compliant                                     |

## OTHER

### Short Description:

Rugged Outdoor Switch, Momentary, 24 V DC @ 0,2 A, 24 V DC (LED) +4, 1 NO, 1.5 Series AMP Superseal 3 Pin Connector, Round, Plastic, Red, No Symbol, Zinc yellow


### Housing colour:

Black

### Housing material:


Plastic

### Component layouts:

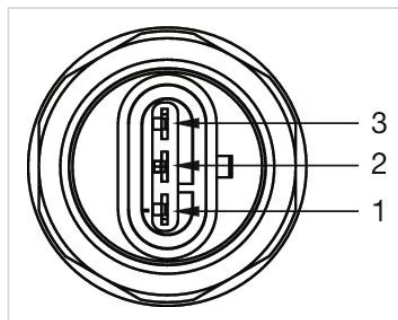

1 = Common +  
2 = Switch Out  
3 = LED - (non illuminated - blank)

### Mounting cut-outs:

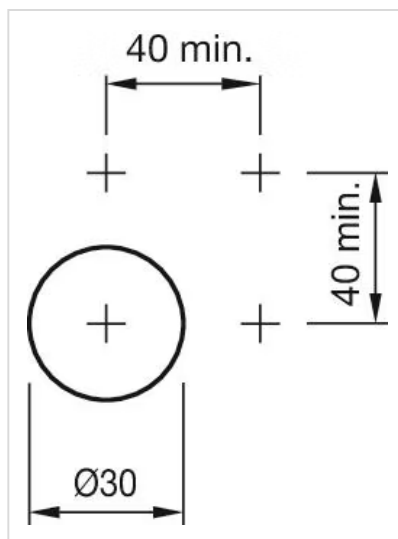

### Dimension drawings:

