

# Actuator

51-  
141.022D



<https://www.eao.com/component/51-141.022D/en/...>

Your product:

---



## 51-141.022D Actuator

### FRONT

**Front dimension:** Ø 18 mm

**Front form:** Round

### MOUNTING

**Design:** Raised

**Mounting type:** Panel mounting

### ELECTRICAL CHARACTERISTICS

**Switching voltage and switching current:**

- 250 VAC, 5 A (ohmic)
- 250 VAC, 3 A (Soldering terminal)
- 250 VAC, 2 A (inductive,  $\cos(\phi) = 0.7$ )
- 125 VAC, 3 A (inductive,  $\cos(\phi) = 0.7$ )
- 220 VDC, 0.1 A (inductive, L:R = 30 ms)
- 110 VDC, 0.2 A (inductive, L:R = 30 ms)
- 60 VDC, 0.7 A (inductive, L:R = 30 ms)
- 24 VDC, 2 A (inductive, L:R = 30 ms)

**Contacts:** 1 NC / 1 NO

**Rated Operational Voltage  $U_e$ :** 250 VAC/DC according to EN IEC 60947-1

**Switching rating:** 250 V @ 5 A

**Electrical lifetime:** 50 000 cycles of operation

**Electric strength:** 2500 VAC, 50 Hz, 1 min. between all terminals and earth, according to IEC 61058-1, part 15

**Protection class:** II

**Standards:** According to EN/IEC 61058-1

**Thermal current  $I_{th}$ :** 5 A, according to EN / IEC 60947-5-1  
The maximum current in continuous operation and at ambient temperature not exceeding the quoted maximum values.

## MECHANICAL CHARACTERISTICS

|                             |                                                                                                                      |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------|
| <b>Terminal:</b>            | Plug-in terminal, 2.8 x 0.5 mm                                                                                       |
| <b>Contact material:</b>    | Gold                                                                                                                 |
| <b>Switching action:</b>    | Rest (a) - Momentary                                                                                                 |
| <b>Switching system:</b>    | Snap-action switching element                                                                                        |
| <b>Switching system:</b>    | Self-cleaning, double-break snap action switching system, 1 normally closed and 1 normally open contact per element. |
| <b>Switching positions:</b> | 2 positions                                                                                                          |
| <b>Switching angle:</b>     | 42° right                                                                                                            |
| <b>Mechanical lifetime:</b> | 50 000 cycles of operation                                                                                           |
| <b>Operating force:</b>     | 1,8 ... 6 N, depending on the number of switching elements                                                           |
| <b>Tightening torque:</b>   | Fixing nut max. 0.5 Nm                                                                                               |
| <b>Weight:</b>              | 0.02 kg                                                                                                              |

## AMBIENT CONDITION

|                               |                                                                                                          |
|-------------------------------|----------------------------------------------------------------------------------------------------------|
| <b>IP front protection:</b>   | IP65, according to DIN EN 60529                                                                          |
| <b>Operating temperature:</b> | – 25 °C ... + 55 °C                                                                                      |
| <b>Storage temperature:</b>   | – 40 °C ... + 85 °C                                                                                      |
| <b>Shock resistance:</b>      | 15 g for 11 ms, as per DIN / EN 60512-4-3, DIN / EN 60068-2-27 (Single impacts, semi-sinusoidal)         |
| <b>Vibration resistance:</b>  | 10 g at 10 Hz...1500 Hz, amplitude 0.75 mm (Sinusoidal), according to DIN EN 60512-4-4, DIN EN 60068-2-6 |
| <b>Climate resistance:</b>    | Standard condition, as per DIN EN 60068-2-30<br>Changing condition, as per DIN EN 60068-2-14             |

## CERTIFICATE

|                      |                                                                             |
|----------------------|-----------------------------------------------------------------------------|
| <b>Approbations:</b> | CB (IEC 61058-1), CQC, CSA, DNV, ENEC (EN 61058-1), UL                      |
| <b>Conformities:</b> | CE, UKCA, 2011 / 65 / EC (RoHS), 2014 / 30 / EU (EMC), 2014 / 35 / EU (LVD) |
| <b>REACH:</b>        | REACH compliant                                                             |
| <b>RoHS:</b>         | RoHS compliant                                                              |


## OTHER

|                           |                                                                                                                              |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------|
| <b>Short Description:</b> | Actuator, Ø 18 mm, Round, 1 NC / 1 NO, Rest (a) - Momentary, Plug-in terminal, 2.8 x 0.5 mm, IP65, according to DIN EN 60529 |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------|


Black

Standard lock: DOM 311


**Switching positions:**

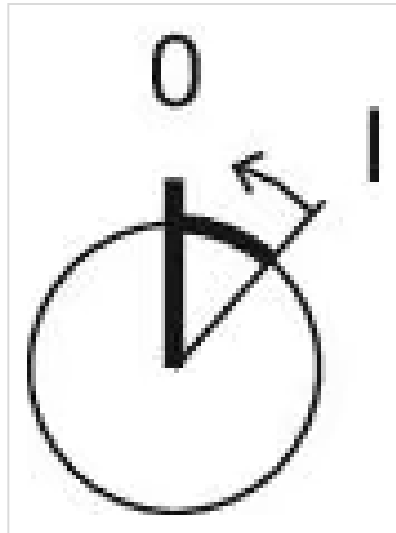

**Wiring diagrams:**

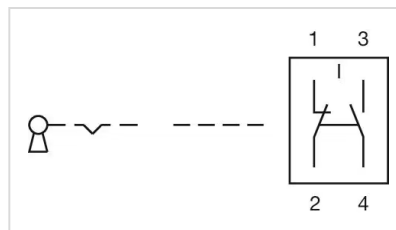


**Component layouts:**

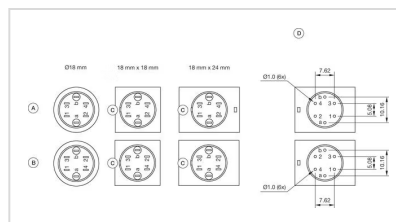


- A = Universal terminal (rear side)  
B = Plug-in terminal (rear side)  
C = Anti twist device  
D = Drilling plan

**Mounting cut-outs:**

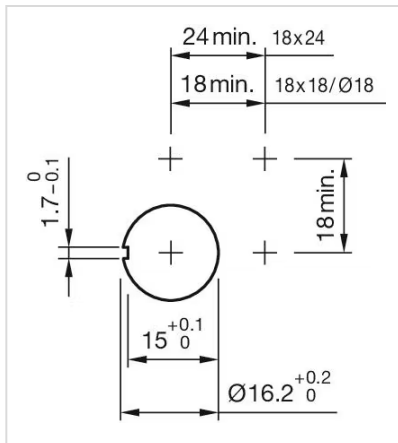

**Dimension drawings:**

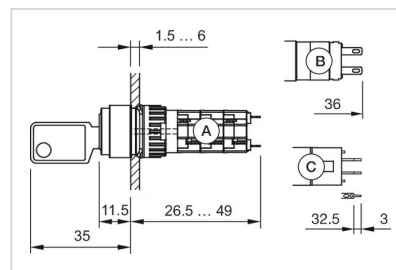

- A = Solder terminal
- B = Plug-in terminal 2.8 mm x 0.5 mm
- C = Universal terminal 2.0 mm x 0.5 mm