


3.0SMAZ5918B thru 3.0SMAZ5956B

Surface Mount Zener Diodes

V_Z Range: 5.1V to 200V Power Dissipation: 3W

Features

- Total power dissipation: 3.0W
- For use in stabilizing and clipping circuits with high power ratings
- Low leakage current
- Moisture sensitivity: level 1, per J-STD-020
- Solder dip 260°C, 10s



DO-214AC (SMA)

Applications

Protection from high voltage, high energy transients.

Mechanical Data

- Case: DO-214AC (SMA)
Molded epoxy body meeting UL 94V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002 and JESD22-B102
- Polarity: Indicated by cathode band

Absolute Maximum Ratings ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Maximum Steady State Power Dissipation @ $T_L=75^{\circ}\text{C}$	P_D	3.0	W
Maximum Instantaneous Forward Voltage @ $I_F=200\text{mA}$	V_F	1.5	V
Thermal Resistance from Junction to Lead ¹	$R_{\theta JL}$	30	$^{\circ}\text{C/W}$
Thermal Resistance from Junction to Ambient ¹	$R_{\theta JA}$	170	$^{\circ}\text{C/W}$
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to +150	$^{\circ}\text{C}$

Note:

1. Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.2" x 0.2" (5.0mm x 5.0mm) copper pad areas.

3.0SMAZ5918B thru 3.0SMAZ5956B

Surface Mount Zener Diodes

V_Z Range: 5.1V to 200V Power Dissipation: 3W

Electrical Characteristics (T_A=25°C unless otherwise noted)

Part Number	Marking Code	Zener Voltage ²	Test Current	Maximum Dynamic Impedance	Knee Current	Knee Impedance	Maximum Reverse Current	Reverse Voltage	Maximum DC Zener Current
		V _Z	I _{ZT}	Z _{ZT} @I _{ZT}	I _{ZK}	Z _{ZK}	I _R	V _R	I _{ZM}
		V	mA	Ω	mA	Ω	μA	V	mA
3.0SMAZ5918B	H18B	5.1	73.5	4	1	350	5	2	588
3.0SMAZ5919B	H19B	5.6	66.9	2	1	250	5	3	534
3.0SMAZ5920B	H20B	6.2	60.5	2	1	200	5	4	482
3.0SMAZ5921B	H21B	6.8	55.1	2.5	1	200	5	5.2	440
3.0SMAZ5922B	H22B	7.5	50	3	0.5	400	5	6	400
3.0SMAZ5923B	H23B	8.2	45.7	3.5	0.5	400	5	6.5	364
3.0SMAZ5924B	H24B	9.1	41.2	4	0.5	500	5	7	328
3.0SMAZ5925B	H25B	10	37.5	4.5	0.25	500	5	8	300
3.0SMAZ5926B	H26B	11	34.1	5.5	0.25	550	1	8.4	272
3.0SMAZ5927B	H27B	12	31.2	6.5	0.25	550	1	9.1	250
3.0SMAZ5928B	H28B	13	28.8	7	0.25	550	1	9.9	230
3.0SMAZ5929B	H29B	15	25	9	0.25	600	1	11.4	200
3.0SMAZ5930B	H30B	16	23.4	10	0.25	600	1	12.2	186
3.0SMAZ5931B	H31B	18	20.8	12	0.25	650	1	13.7	166
3.0SMAZ5932B	H32B	20	18.7	14	0.25	650	1	15.2	150
3.0SMAZ5933B	H33B	22	17	17.5	0.25	650	1	16.7	136
3.0SMAZ5934B	H34B	24	15.6	19	0.25	700	1	18.2	124
3.0SMAZ5935B	H35B	27	13.9	23	0.25	700	1	20.6	110
3.0SMAZ5936B	H36B	30	12.5	28	0.25	750	1	22.8	100
3.0SMAZ5937B	H37B	33	11.4	33	0.25	800	1	25.1	90
3.0SMAZ5938B	H38B	36	10.4	38	0.25	850	1	27.4	82
3.0SMAZ5939B	H39B	39	9.6	45	0.25	900	1	29.7	76
3.0SMAZ5940B	H40B	43	8.7	53	0.25	950	1	32.7	68
3.0SMAZ5941B	H41B	47	8	67	0.25	1000	1	35.8	62
3.0SMAZ5942B	H42B	51	7.3	70	0.25	1100	1	38.8	58
3.0SMAZ5943B	H43B	56	6.7	86	0.25	1300	1	42.6	52
3.0SMAZ5944B	H44B	62	6	100	0.25	1500	1	47.1	48
3.0SMAZ5945B	H45B	68	5.5	120	0.25	1700	1	51.7	44
3.0SMAZ5946B	H46B	75	5	140	0.25	2000	1	56	40
3.0SMAZ5947B	H47B	82	4.6	160	0.25	2500	1	62.2	36
3.0SMAZ5948B	H48B	91	4.1	200	0.25	3000	1	69.2	32
3.0SMAZ5949B	H49B	100	3.7	250	0.25	3100	1	76	30
3.0SMAZ5950B	H50B	110	3.4	300	0.25	4000	1	83.6	26
3.0SMAZ5951B	H51B	120	3.1	380	0.25	4500	1	91.2	24
3.0SMAZ5952B	H52B	130	2.9	450	0.25	5000	1	98.8	22
3.0SMAZ5953B	H53B	150	2.5	600	0.25	6000	1	114	20
3.0SMAZ5954B	H54B	160	2.3	700	0.25	6500	1	121.6	18
3.0SMAZ5955B	H55B	180	2.1	900	0.25	7000	1	136.8	16
3.0SMAZ5956B	H56B	200	1.9	1200	0.25	8000	1	152	14

Note:

2. Zener voltage tolerance is ±5%.

3.0SMAZ5918B thru 3.0SMAZ5956B

Surface Mount Zener Diodes

V_Z Range: 5.1V to 200V Power Dissipation: 3W

Typical Electrical Characteristic Curves

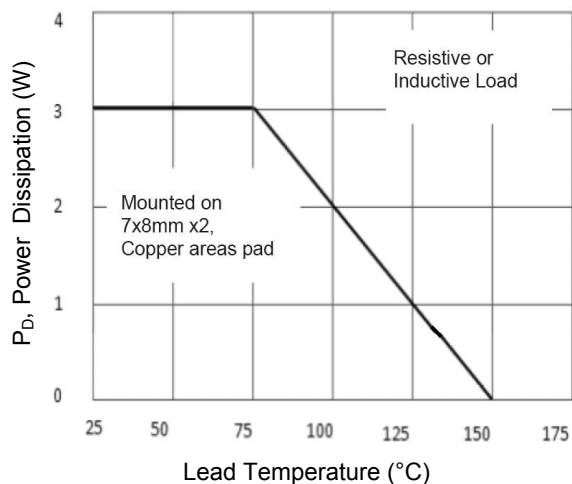


Figure 1. Maximum Continuous Power Dissipation

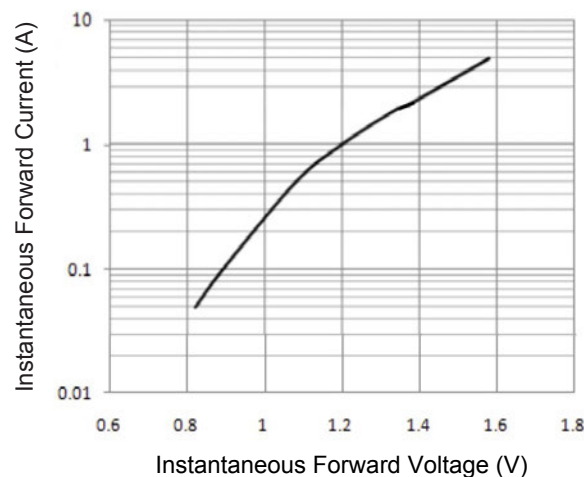


Figure 2. Typical Instantaneous Forward Characteristics

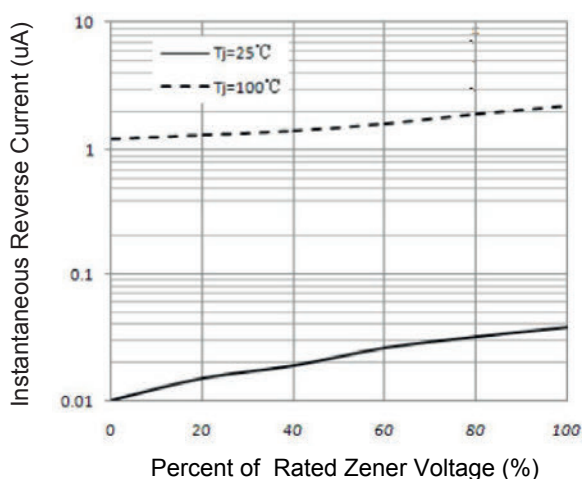


Figure 3. Typical Reverse Characteristics

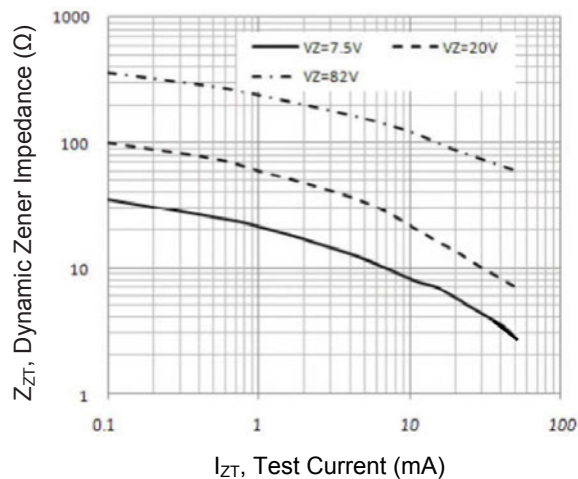



Figure 4. Typical Zener Impedance

3.0SMAZ5918B thru 3.0SMAZ5956B

Surface Mount Zener Diodes


Vz Range: 5.1V to 200V Power Dissipation: 3W

Package Outline Dimensions DO-214AC (SMA)

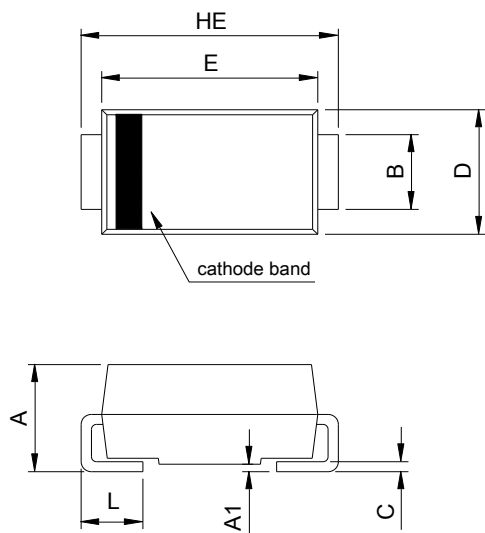

SMA (DO-214AC)				
DIM	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	1.90	2.30	0.075	0.091
A1	0.00	0.20	0.000	0.008
B	1.25	1.65	0.049	0.065
C	0.15	0.31	0.006	0.012
D	2.35	2.90	0.093	0.114
E	3.99	4.60	0.157	0.181
HE	4.80	5.30	0.189	0.209
L	0.76	1.52	0.030	0.060

Recommended Pad Layout

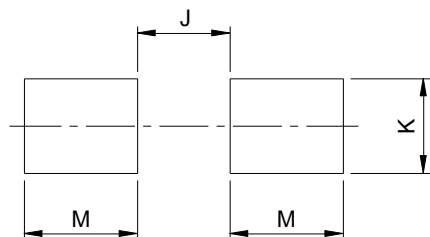

Recommended Pad Layout (Reference ONLY)				
DIM	Millimeters		Inches	
	Min.	Max.	Min.	Max.
J	-	2.20	-	0.087
K	1.72	-	0.068	-
M	2.00	-	0.079	-

Ordering information

Device	Package	Quantity	HSF Status
3.0SMAZ59xxB	DO-214AC (SMA)	7,500pcs / Reel	RoHS Compliant