

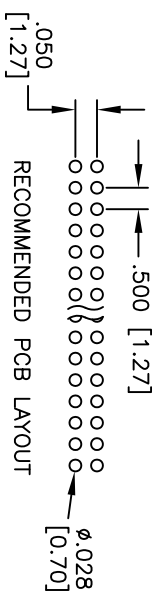
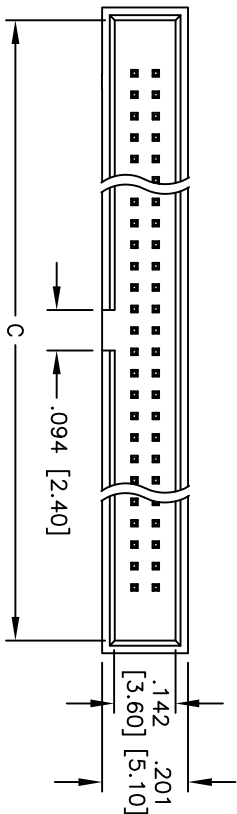


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/22/11	
A		REVISED SPEC.	8/15/14	HR/SY

APPROVED: _____
DATE: _____ TITLE: _____

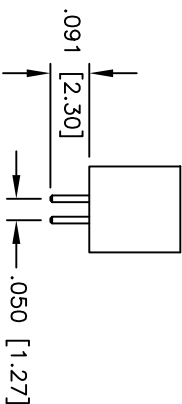

RECOMMENDED PCB LAYOUT

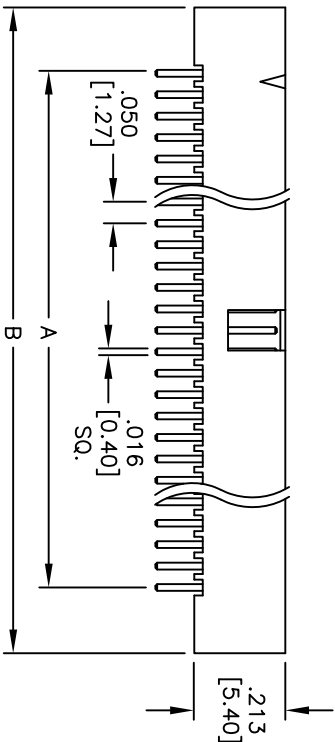

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash plated over Nickel

Electrical:

Operating voltage: 250 VAC max.

Current rating: 1 Amp max.

Contact resistance: 20 mohms max. initial

Insulation resistance: 5,000 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant

Positions: 6, 8, 10, 12, 14, 16, 20, 26, 30, 34, 40, 44, 50,
60, 64, 68, 80, 100

A = .050 [1.27] x No. of Spaces

B = .050 [1.27] x No. of Spaces + .298 [7.57]

C = .050 [1.27] x No. of Spaces + .239 [6.07]

ADAM TECH

909 Railway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

.050" x .050" BOX HEADER

VERTICAL MOUNT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				INCHES				HOLES			
.X	± .10	ØX	± .10	.XX	± .020	ØXX	± .015	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE							
DRAWN	DY		2/22/11								
CHECKED											
APPROVED											
				TITLE				SIZE			
				PART NO.				REV.			
				HBHR-B-XX-VG				A			
				SCALE: NTS				SHEET 1 OF 1			

ROHS
COMPLIANT