

# Actuator

45-  
2F0V.2010.000



<https://www.eao.com/component/45-2F0V.2010.00...>

Your product:

---



## 45-2F0V.2010.000 Actuator

### FRONT

|                       |           |
|-----------------------|-----------|
| Front dimension:      | Ø 29,5 mm |
| Front form:           | Round     |
| Front bezel colour:   | Silver    |
| Front bezel material: | Metal     |

### MOUNTING

|                   |                |
|-------------------|----------------|
| Design:           | Raised         |
| Mounting cut-out: | Ø 22.3 mm      |
| Mounting type:    | Panel mounting |

### OPERATING-/INDICATION PART

|                 |         |
|-----------------|---------|
| Lever colour:   | Black   |
| Lever material: | plastic |

### MECHANICAL CHARACTERISTICS

|                      |                                                        |
|----------------------|--------------------------------------------------------|
| Switching action:    | Momentary                                              |
| Mechanical lifetime: | 250 000 cycles of operation per direction of actuation |
| Weight:              | 0.085 kg                                               |

### AMBIENT CONDITION


|                        |                     |
|------------------------|---------------------|
| IP front protection:   | IP65, IP67          |
| Operating temperature: | – 25 °C ... + 70 °C |

|                              |                                                                  |
|------------------------------|------------------------------------------------------------------|
| <b>Storage temperature:</b>  | – 40 °C ... + 80 °C                                              |
| <b>Shock resistance:</b>     | According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms   |
| <b>Vibration resistance:</b> | According to IEC 60068-2-6: 10 ... 500 Hz: 5 g                   |
| <b>Climate resistance:</b>   | During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6, 3B2 |


## CERTIFICATE

|               |                 |
|---------------|-----------------|
| <b>REACH:</b> | REACH compliant |
| <b>RoHS:</b>  | RoHS compliant  |

## OTHER
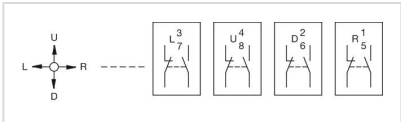
|                            |                                                                                      |
|----------------------------|--------------------------------------------------------------------------------------|
| <b>Short Description:</b>  | Actuator, Ø 22.3 mm, Ø 29,5 mm, Black, Round, Silver, Metal, Momentary, IP65, IP67   |
| <b>Housing material:</b>   | Metal                                                                                |
| <b>Product attributes:</b> | 4 positions                                                                          |
| <b>Hints:</b>              | Lockable only in center position                                                     |
| <b>Wiring diagrams:</b>    |  |

## Mounting cut-outs:

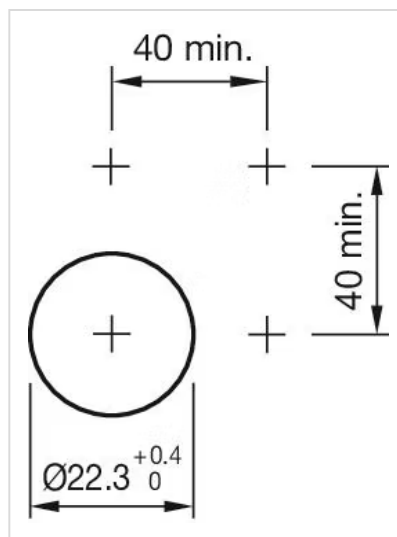

## Dimension drawings:

