Your Expert Partner for **Human Machine Interfaces**

Lamp block

704.952.159.3

https://www.eao.com/component/704.952.159.3/e...

Your product:

704.952.159.3
Lamp block

OPERATING-/INDICATION PART

Illumination colour:	White / White

ELECTRICAL CHARACTERISTICS

Operating voltage:	110 V AC/DC (-30% / +25%)
Operation current:	8 mA

MECHANICAL CHARACTERISTICS

Terminal:	Push-in terminal
Wire cross section:	Max. wire cross-section 2 wires with 1 mm Skinning wire 8 mm Max. wire cross-section of stranded cable 2 x 0.75 mm^2 use stranded wires only with wire end ferrules of 8 mm length Only one polarity is allowed on each side when wiring.
Weight:	0.014 kg

AMBIENT CONDITION

IP Protection:	IP20
Operating temperature:	– 40 °C ... + 55 °C
Storage temperature:	– 40 °C ... + 85 °C
Shock resistance:	Max. 500 m/s^2, pulse width 11 ms (sinusoidal DIN EN 60068-2-27)
Climate resistance:	Relative humidity, max. 95%, non-condensing

CERTIFICATE

Approbations:	EN 45545, UL-94 V0
REACH:	

REACH compliant

RoHS: RoHS compliant

OTHER

Short Description: Lamp block, Plastic, Push-in terminal

Housing material: Plastic

Hints: When using the lamp block, the application guidelines must be observed.

Wiring diagrams:

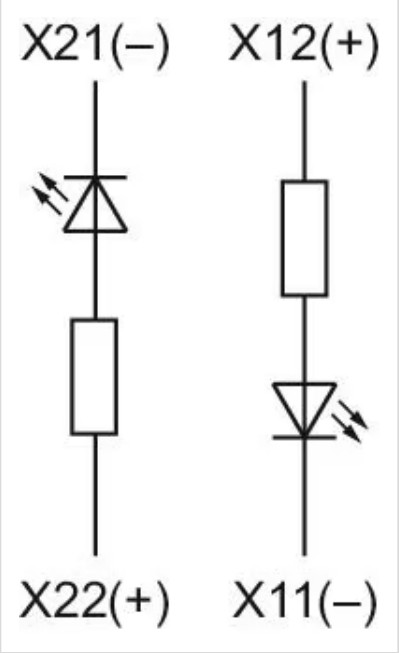

Component layouts:

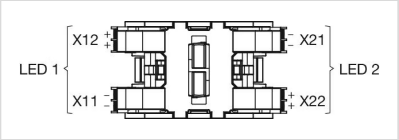

Dimension drawings:

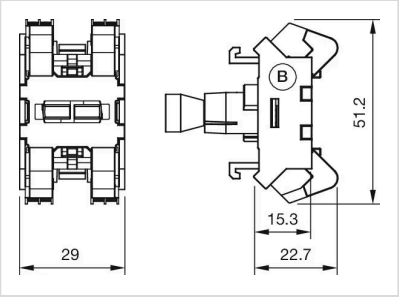

B = Push-in terminal (PIT)