

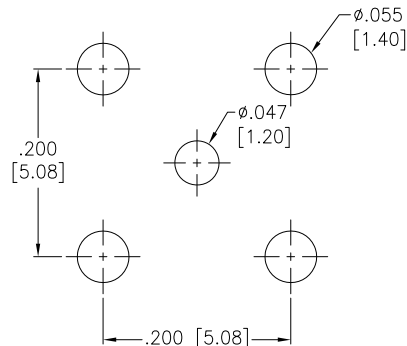


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-	9114	RELEASED	11/04/08	
A		REVISED DIM.	12/11/08	
B		REDRAWN	4/20/16	AY/LW

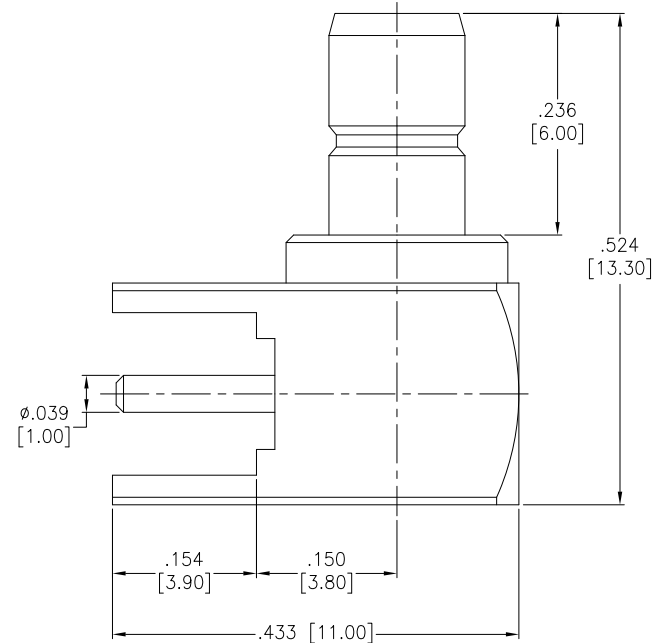

RECOMMENDED PCB LAYOUT

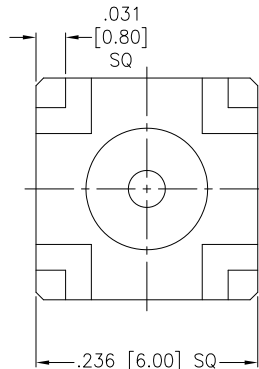

INSULATOR	PTFE	WHITE
HOUSING	BRASS	GOLD
CONTACT PIN	BRASS	GOLD
INSULATOR	PTFE	WHITE
BODY	BRASS	GOLD
DESCRIPTION	MATERIAL	FINISH

SPECIFICATIONS:

Electrical:

Nominal Impedance: 50 ohms

Frequency range: 0-4 GHz

Working Voltage: 335 VOLTS Max

Proof Voltage: 1000 VOLTS

Temperature Rating:

Operating temperature: -65°C to +165°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ±.10 Ø.X ±.10
.XX ±.020 Ø.XX ±.015
.XXX ±.015 Ø.XXX ±.010

APPROVALS		DATE
DRAWN	DY	11/04/08
CHECKED		
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE			REV.
SMB JACK R/A PCB MOUNT			B
SIZE	PART NO.		
X	RF3-06-T-00-50-G		
REF:	S00277T	SCALE: NTS	SHEET 1 OF 1