
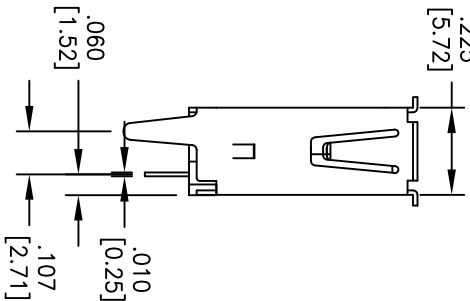
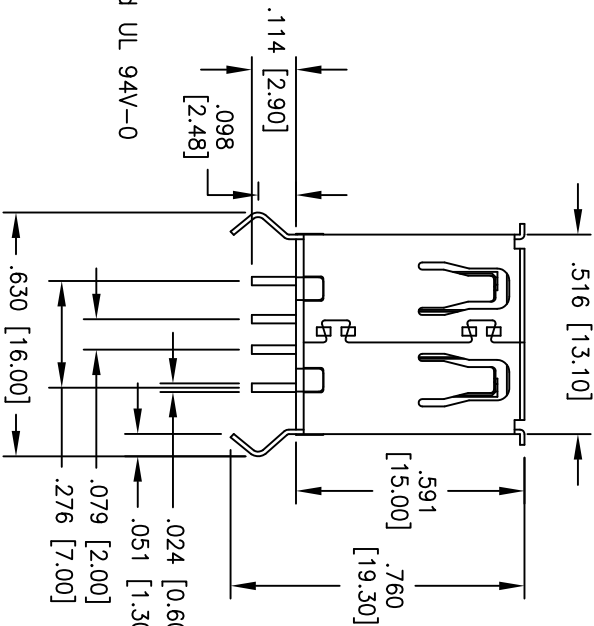
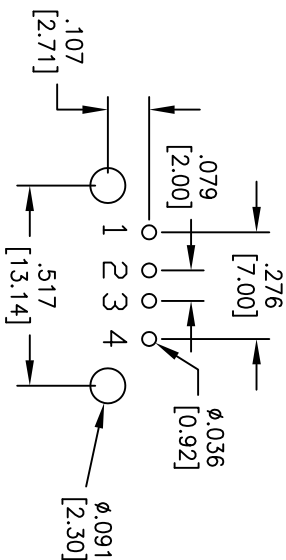


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/08/10	
A		REVISED DIM.	5/30/11	
B		REVISED SPEC.	12/22/11	
C		REVISED SPEC.	7/13/15	AV/KW

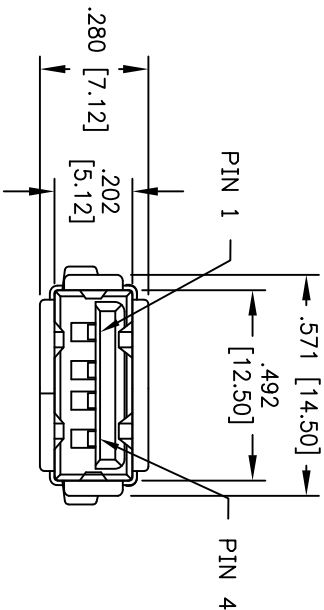

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Shell: Brass, nickel plated

Plating:

Gold over Nickel underplate on contact area,
Tin over Copper underplate on PCB tails

Electrical:

Operating voltage: 30 VAC max.
Current rating: 1.5 Amp max @ 250V AC.

Contact resistance: 30 mohms max.
Insulation resistance: 1000 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:

Operating temperature: -40°C to +85°C
Environmental:

Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

UNIVERSAL SERIAL BUS
SINGLE PORT, VERTICAL, PCB

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES				TITLE			
.X	± .10	ØX	± .10	SIZE	PART NO.	REV.	
.XX	± .020	ØXX	± .015	X	USB-A-S-VT-HT	C	
.XXX	± .015	ØXXX	± .010	REF: S00005C	SCALE: NTS	SHEET 1 OF 1	
APPROVALS				DATE			
DRAWN	DY	4/08/10					
CHECKED							
APPROVED							