




## Quartz Crystal

HC-49/U3H (low profile)

part no.	12.84110
model	KX - 3H
frequency	10.0 MHz
holder type	HC-49/U3H
mode	fundamental
operating temperature	-20° ~ +70°C
frequency tolerance at +25°C	±30 ppm
temperature tolerance at -20° ~ +70°C	±50 ppm
load capacitance $C_L$	16 pF
series resistance $R_1$ (ESR) max.	60 Ohm
aging at +25°C (first year) max.	±2 ppm
shunt capacitance $C_0$ max.	7 pF
drive level max.	0.1 mW
contents of standard package	200 pcs.per bag / 2000 pcs. per box (10 bags)

### Dimensions (mm):

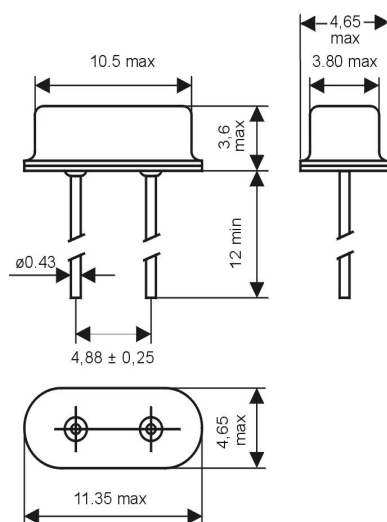

### Wave soldering condition:

